


**KIT 2601  
SIGNAL TOWER  
N SCALE**

PARTS LIST

- 1- Bottom, front & rear
- 2- Bottom, side, L&R
- 3- Top, front & rear
- 4- Top, Side, L&R
- 5- Roof
- 6- Sub-Roof
- 7- Foundation
- 8- Door, 2 required
- 9- Windows, 12 required
- 10- Smokejack
- 11- Signal platform, 1 req'd.
- 12 Platform Railings, 2 req'd.
- 13- Signal mast
- 14- Signal flags.

USE ONLY LIQUID CEMENT FOR PLASTICS.  
APPLY CEMENT SPARINGLY WITH A SMALL BRUSH.  
CAREFULLY TRIM AND FIT ALL PARTS BEFORE ASSEMBLY.  
USE ONLY PAINT THAT IS COMPATIBLE WITH STYRENE PLASTIC. SPRAY PAINTING IS RECOMMENDED.  
TRIM PARTS CAREFULLY FROM THE RUNNERS WITH A SHARP, POINTED MODELER'S KNIFE. DO NOT TWIST PARTS OFF, AS THIS WILL DAMAGE THEM. REMOVE PARTS ONLY AS THEY ARE NEEDED.  
"FLASH" CAN BE REMOVED BY SCRAPING WITH A SHARP KNIFE.

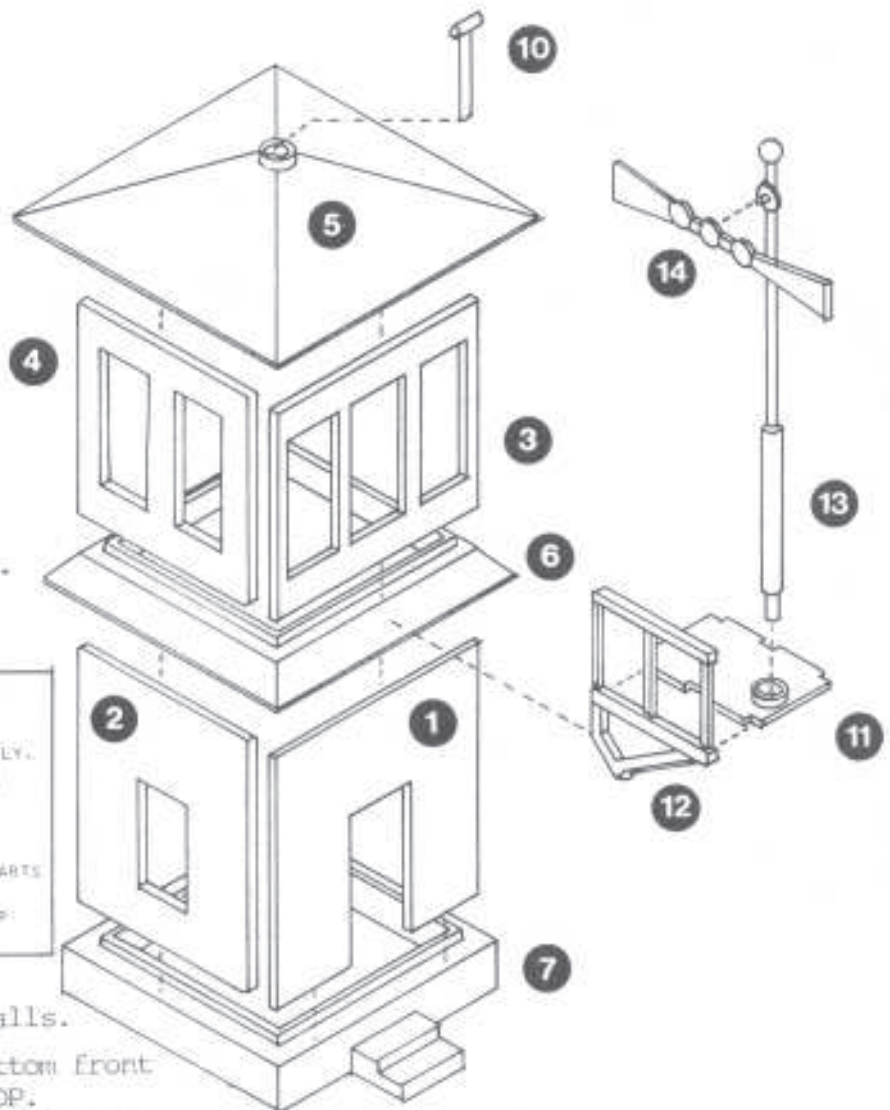

File "draft angles" off edges of walls.

- (1) Assemble bottom sides, -2- to bottom front and rear -1-, with numbers at TOP.
- (2) Assemble top sides -4- to top front and rear -3-, with numbers at TOP.
- (3) Trim rounded end of smokejack -10- and cement to roof -5-.
- (4) Cement platform railings-12- to each side of Platform -11-.
- (5) Cement Signal Flag -14- to Mast -13-.
- (6) Paint sub-assemblies with spray or air brush.

- (7) Cement windows and doors in place from INSIDE.
- (8) Cement bottom walls to foundation.
- (9) Cement roof to upper walls.
- (10) Cement upper walls to sub-roof.
- (11) Cement lower walls to sub-roof.
- (12) Push Signal Mast into hole on platform. Cement Platform to Signal Tower. (This is optional, according to the use of the tower.
- (13) Touch up paint and apply weathering with water color, pastel chalks and airbrush.

We recommend:

Walls: Dark Red, Grey Green or yellow  
Roof: Aluminum, Grimy black, Dark Green  
Signal Mast: Silver, with red flags.  
Foundation- Grey concrete  
Trim/windows/Doors/ Platform: White  
Dark yellow, Dark red

NOTE; Paint windows and doors before removing them from the runners. They are installed from inside. Scrape paint from areas to be cemented.

The window and door trim was molded on the sides, which allows for delicate looking windows. However, they are difficult to paint. Use a 0000 brush, magnifying glass and patience.

**TICHY TRAIN GROUP  
PO BOX 220  
ALAMANCE NC 27201-0220  
WWW.TICHYTRAINGROUP.COM**